


Wing span [mm]:	1500
Wing area [dm <sup>2</sup> ]:	22,4
Aspect ratio:	10
Take-off weight [g]:	270
Airfoil:	Zone 52-21

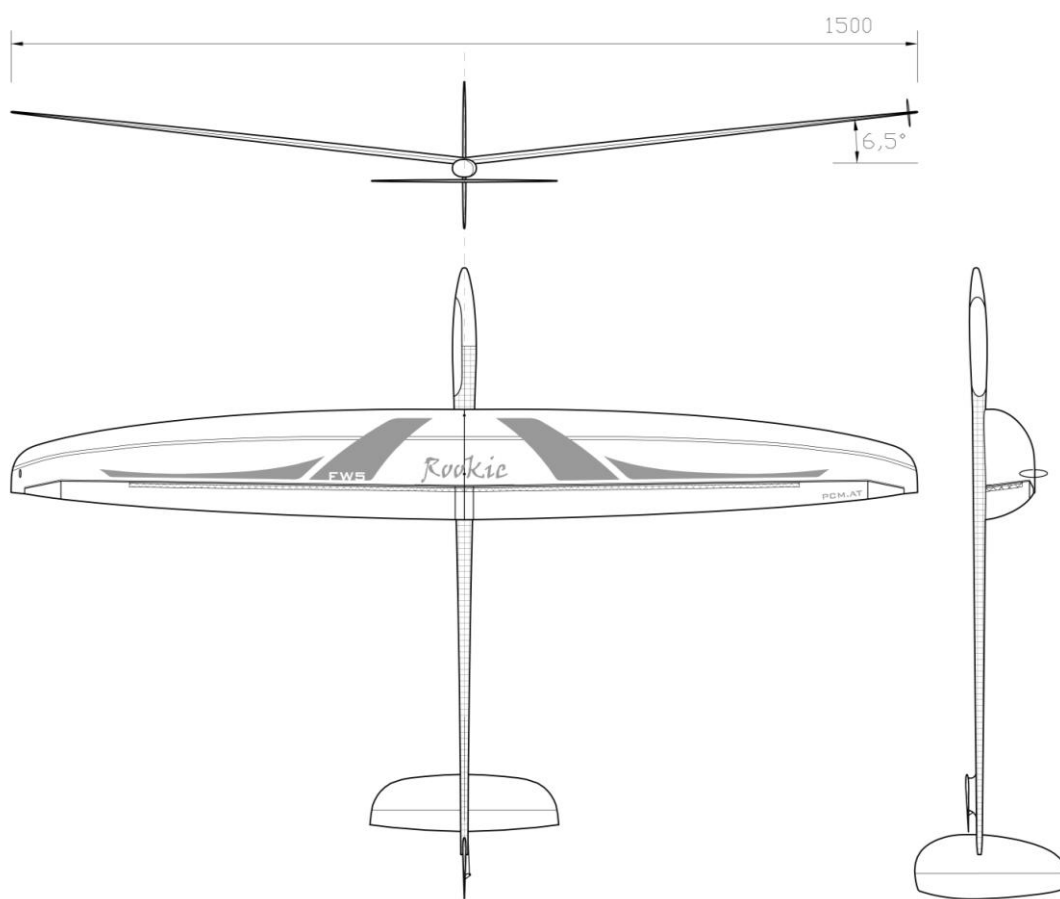

## BUILDING INSTRUCTION

SAL-DLG FW5 Rookie

## CONTENTS

### DATA

1. Kit – contents	3
2. What else do you need?	3
3. Electronic equipment	3
4. Settings for the first flight	4

### ASSEMBLING THE MODEL 6

5. Mounting of the stabilizer	7
5.1 Sanding the airfoil	7
5.2 Mounting of the elevator	8
5.3 Mounting of the rudder	10
5.4 Installation of torsion springs	11
5.5 Connection of the wire	13
6. Fuselage structure	14
6.1 Radio board	14
6.2 Ballast	15
6.3 Accumulator and receiver	16
6.4 Canopy lock	17
6.5 Installing 2,4Ghz	17
7. Controlling the ailerons	18
7.1 Connection of levers	18
7.2 Push rods	19
8. Installation of throwing blade	21
9. Optimizing	23
9.1 Centering the masses	23
9.1.1 Flightpath during start	23
9.2 Ends of ailerons	23
9.3 Leading edge of wing	23
9.4 Voltage control	23
10. Installation of antenna 35MHz	24

### OTHER

11. Check list before starting	25
12. Notes for the use	25
13. Template for throwing peg	26

## DATA

### 1. Kit – contents

Fuselage + canopy  
 Wing  
 Rudder and elevator (balsa)  
 Radio board  
 Lever for controlling elevator and rudder, 2 pc.  
 Kevlar wire, 2x length of fuselage  
 Steel wire for torsion spring, 2 pc.  
 Brass pipes for levers of ailerons, 2 pc.  
 Carbon pipes for push rods for controlling ailerons, 2 pc..  
 Steel wire 1mm, 0,5mm  
 Screws for fixing wing, 2 pieces (1x 25mm)  
 Throwing blade, 1 pc.  
 Magnets for lock of canopy  
 Lead balls for ballast  
 Steel wire (1,2mm) for ballast  
 Aluminium pipes, 4 und 5mm for fixing elevator, 4 pc.  
 Nylon screws for fixing elevator, 2 pc.  
 Carbon platelets, 4 pc.  
 Carbon tape, l=100cm

Building instruction (please download from website)

### 2. What else do you need:

Epoxy-glue (for example UHU 300 endfest or Stabilit)  
 Super glue  
 UHU-Por  
 Cotton flocks (for thickening Epoxy-glue)  
 Pore filler (for sealing balsa surface)  
 Electrical equipment (On/Off-switch, cables, plug, ...)  
 Electronic equipment  
 Steel wire, shrinking tube...


### 3. Electronic equipment

Servo elevator	- Graupner C 261 (cuttings on radio board are prepared for this servo) - Graupner DS 281 - Hitec HS 5045HB
Servo rudder	- Dymond D-47 (cuttings on radio board are prepared for this servo) Same style: - Futaba FS31 - Modell Expert X31
Servos aileron	- Graupner C 261 (cuttings on radio board are prepared for this servo) - Graupner DS 281 - Hitec HS 5045HB
Accumulators:	- GP NiMH accu 35AAAAH, Weight/cell 6g (1,2 Volt 0,35 Ah 1/2AAAA) - 240mA/h Li-Ion Akkus, 2 Stk. parallel with pusher
Receiver:	- 2,4GHz possible due to kevlar fuse cone
Logger:	- Logo - Lola - Ram3 - Z-Log


#### 4. Settings for the first flight

**Centre of gravity: 65-70mm** (measure from the leading edge of the wing to the back)


**Ailerons** (measure near fuselage)

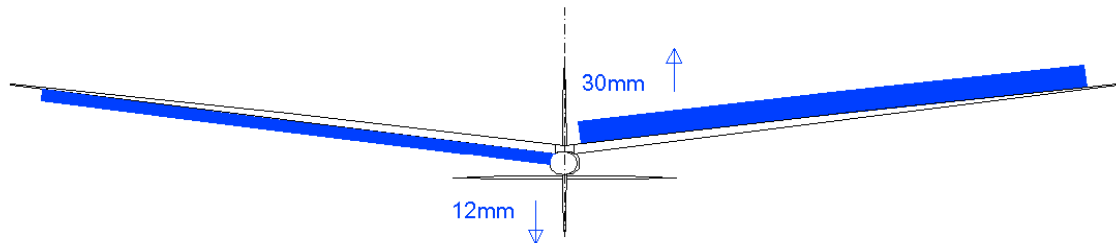


**Flaps negative (start, speed)** (measure near fuselage)

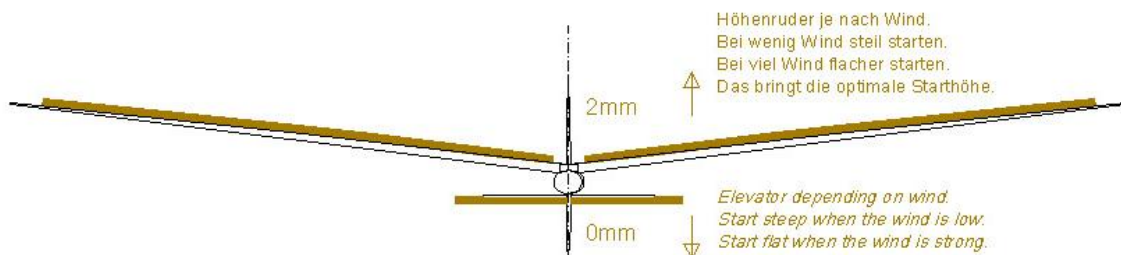


**Flaps negative (cross-country)** (measure near fuselage)



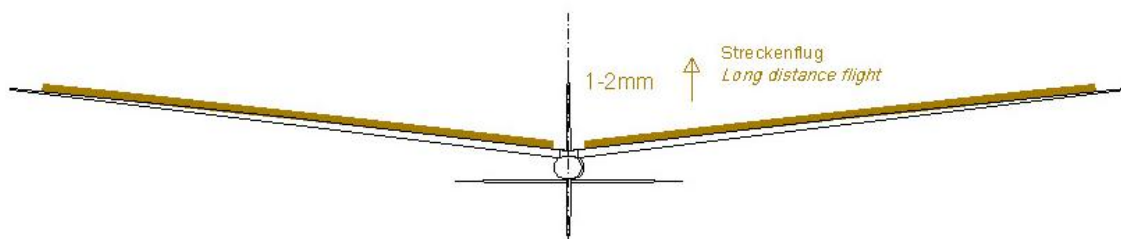


**Flaps positive (thermal 1)** (measure near fuselage)

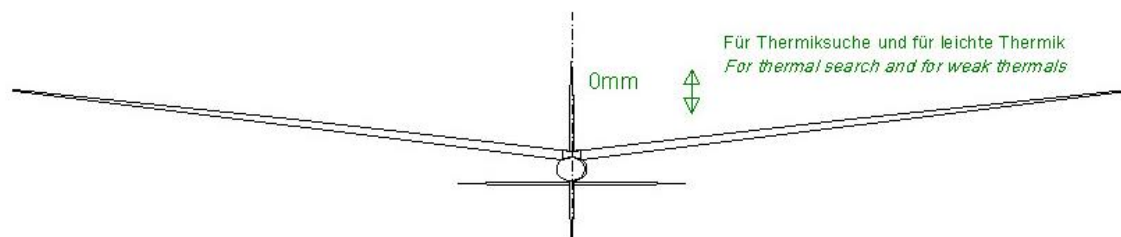

**Flaps positive (thermal 2)** (measure near fuselage)

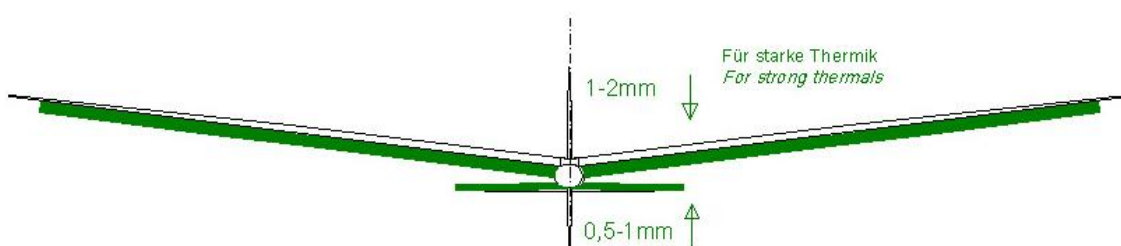

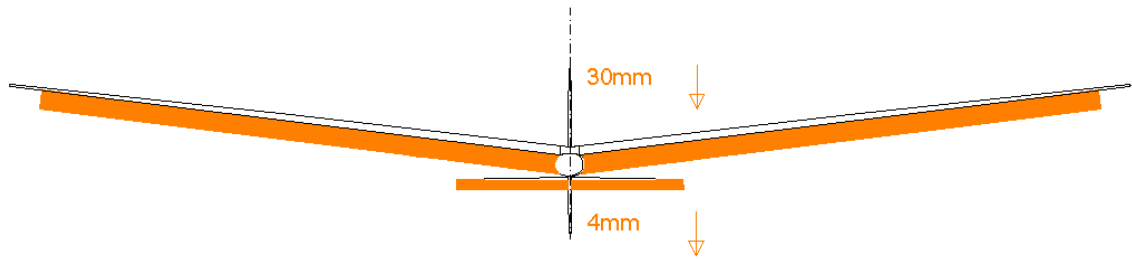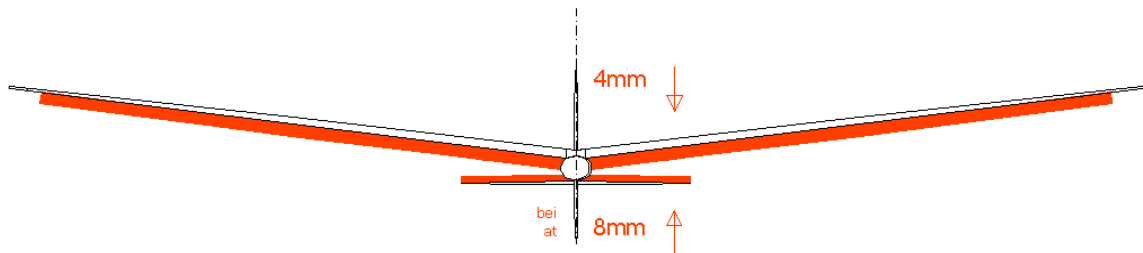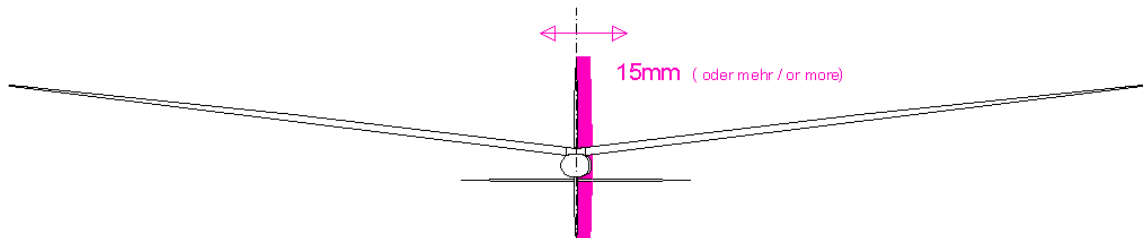**Landing position** (measure near fuselage)**Snap Flap** (measure near fuselage)**Rudder** (measure at deepest point)

**Don't make a SAL-start at your first flight. Hold the glider on the fuselage and throw it gently.**

## ASSEMBLING THE MODEL

### General information on DLG-models

DLG-models are constructed **strong enough** to withstand the demands of starting, flying and landing and at the same time **light enough** to achieve the least possible flying weight. Each part is dimensioned to its possible minimum and produced using lightest and fewest material.

In order to continue this concept, please account the following when you assemble the model:

- Always **use glue sparingly**. **Grind** all gluing spots **thoroughly**, before you apply the glue.
- **Electronic components** should be **placed as far as possible to the front**, as you normally need additional lead in the nose of the fuselage to achieve the necessary centre of gravity.
- For the same reason try to **save weight** especially when you **finish and mount the stabilizer**.
- If you don't have any experience in working with resin or if you prefer an easier method, you can combine the **carbon rovings and glass fibre with super glue**: Put some drops of super glue on the rovings or the fibre, spread and press it with a (rustling) plastic bag. You will also save one or the other gram with this method.

As FW5 Rookie has developed from the Fireworks-family, you will find some pictures of Fireworks 4 and FW5 Flow in the following instruction. Don't let yourself be confused by this, the way of building described is quite the same.


## 5. Mounting of the stabilizer

### 5.1 Sanding the airfoil

To **make grinding easier**, you can use simple working aids:

Make simple **grinding blocks** out of material that can be easily worked on, f.e. **hard foam**. Cut one edge in an **angle of 30°**, the other one in an **angle of 10°**. For cutting use a hot wire or a sharp knife.

Glue abrasive paper with **grain size 80** on the sloping surfaces.


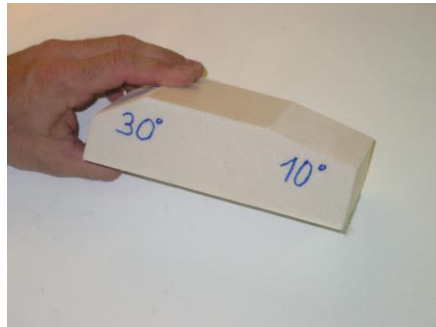


Now draw a **parallel line to the leading edge**. You can also – as shown here – softly scratch the line into the balsa.

**Rudder: 9mm**  
**Elevator: 6,5mm**



Grind the edge with the **10°-block** until you touch the line. Then, **chamfer** the edge with the **30°-block**. Note, that the balsa parts lie flat on the table with the not sanded surface, when you grind.

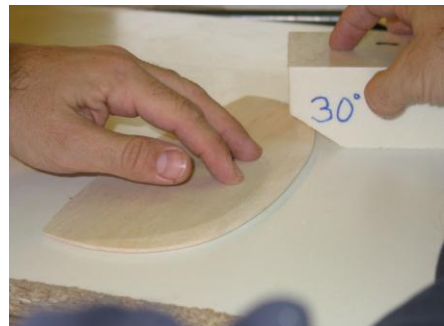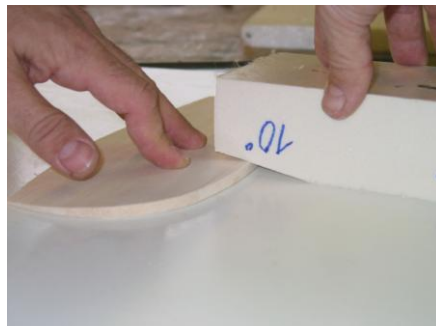


Mark each line on the **upper- and the underside**.

At last, sand the edges with **fine sandpaper** (grain size 400).



To reinforce the stabs **glue the carbon tapes** enclosed in the kit with **epoxy glue** or thin **superglue**. To do so, apply the carbon tape on the correct spot, drop some super glue on it and spread the glue with a (rustling) plastic bag. You can also attach the tapes with some adhesive spray first. But try to use only little spray, as the spray deteriorates the bond of superglue.

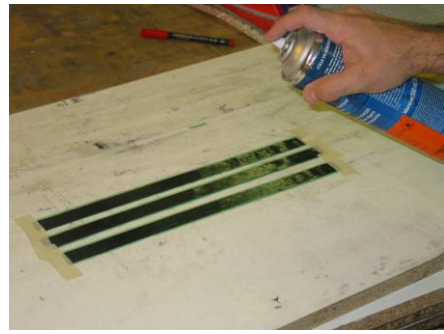


Before gluing cut some of the tapes in **half**, or in **quarter width** with a sharp knife



Always apply the carbon reinforcements **on both sides**.




Then, coat the balsa parts with **pore filler** twice to seal the surface. Sand the surface afterwards with a soft sandpaper. The balsa will have a **thin protective film**, which will extend the durability of the stabs.

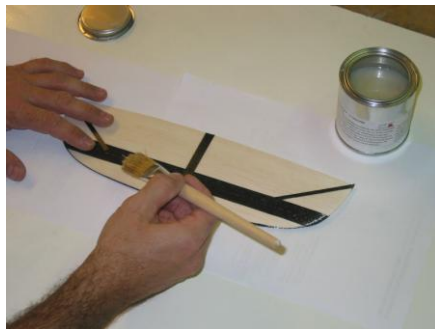



## 5.2 Mounting of the elevator

The mounting of the elevator is done with **aluminum rods** according to the adjacent drawing.

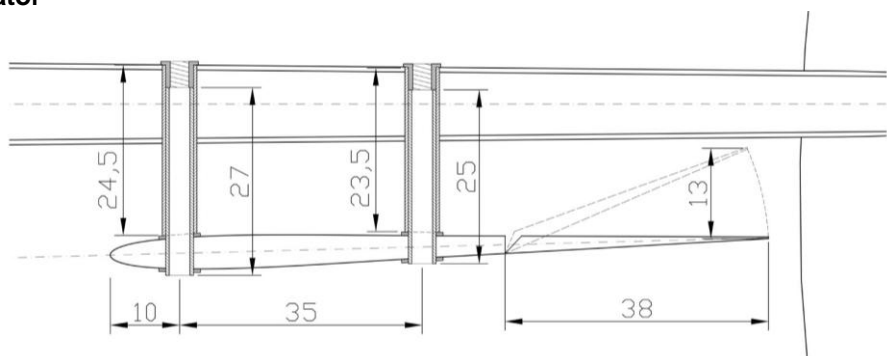




Drill 2 holes with **d=4mm** into the elevator according to the photo. Then cut off the control surface. The **depth is 38mm** in the middle of the control surface.

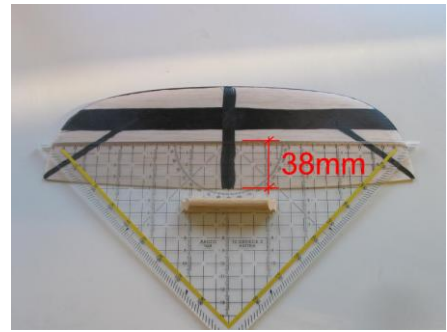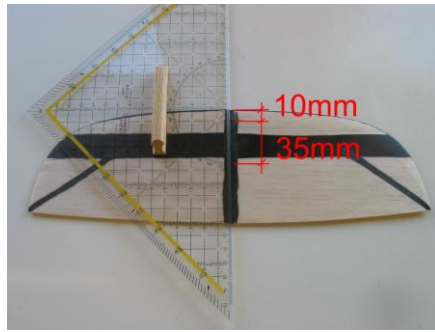


Cut the **4mm Aluminium pipes** to following sizes: **27mm (front)** and **25mm (rear)** and glue them into the drilled holes. As reinforcement you can add a **carbon platelet** on each side.

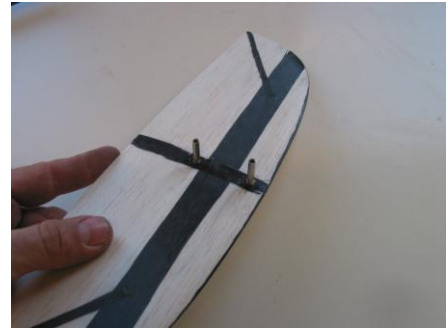

Now cut the 5mm aluminum pipes: **24,5mm (front)** **23,5mm (rear)**. Press the **threaded inserts** into the pipes. The **thread** should then be **recut**, since it is slightly smaller due to the pressing.



Now the **position** of the aluminum tubes can be **transferred to the fuselage**. Put everything "dry" together and check the **proper alignment**. Then fix the 5mm tubes with thin **superglue**.

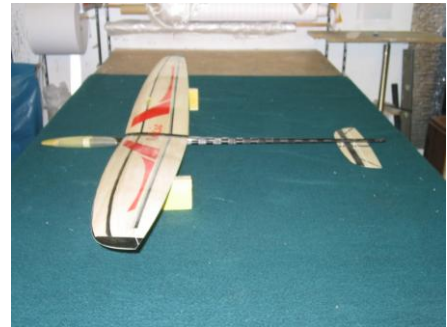

If you have cut the aluminium tubes properly, the **difference in angle of attack** between wing and elevator is set correctly. It is **1°**.

The distance between elevator and fuselage should be large enough, so that a rudder **deflection of 13 mm** is possible.



The remaining work on the elevator (linkage of the control surface) is analog to the rudder. (chapter 5.3 to 5.5)



### 5.3 Mounting of the rudder


First, **cut the rudder** (moving part). This control surface has a **depth of 38mm** at the widest point. The hinge line is 90° to the axis of the fuselage.

The further description is based on images of FW5, as the tails are almost identical.

Sand the rudder **wedge-shaped** on the **hinge line**, so that you can move it in both directions. Note that the **hinge line** must be placed **on the left side** (looking towards flight direction) for **right-handers** and the other way round for left-handed persons.



Rudder for **right-handers** (view from above)

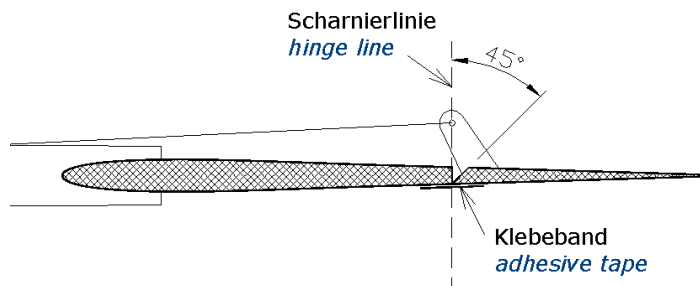

Next, glue the **lever** in extension of the axis of the boom. The **hole of the lever** should be **above the hinge line**.

Before you fix the control surface of the rudder with **adhesive tape**, put some **UHU-por** on the gluing spots to improve the gluing force of the tape.



Spread the UHU-Por with your finger.

**Fix the rudder** with 2 **small stripes** of tape to keep it in the right position. (As soon as you have applied the tape on the UHU-por, you can't remove it anymore without destroying the surface.)


Now you can **apply the adhesive tape**.

#### 5.4 Installation of torsion springs:

**Bend** the wire according to the drawing below. Then, **tip back** the **control surface** of the rudder completely. **Stick** the spring **into the rudder**, one end into the unmoved part, one end into the control surface near the lever.



Then **harden** the spots **with super glue**.

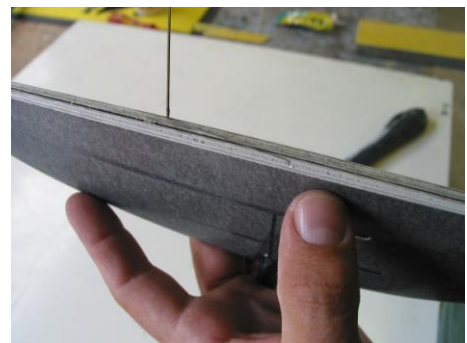




**Push the rudder** (first for a test) into the oval end of the boom as far as it will go. Then check, if the stabilizer is **aligned correctly** on each axis.

Now **glue fuselage and rudder** with **thin super glue**, where they touch each other.

In order to **fix the tail in the correct position** during bonding, you can use a small screw clamp.

You should **enforce the join** between boom and rudder additionally with a thin **carbon roving**, which you glue with **thin super glue**.


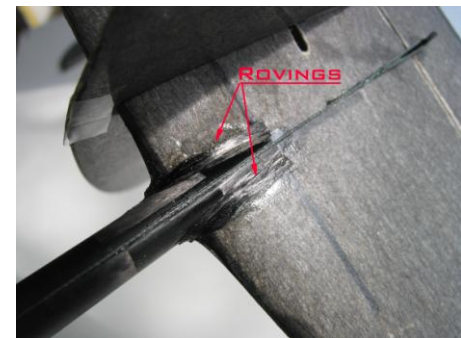


### 5.5 Connection of the wire

Now you can **hook in the kevlar wire** into the lever.

Make a **loop, twist the end** and fix it with a **drop of super glue**.


Note: Don't use a shrinking tube, as the kevlar wire could be damaged by the high temperature during shrinking.

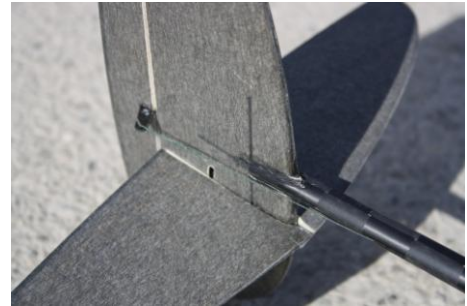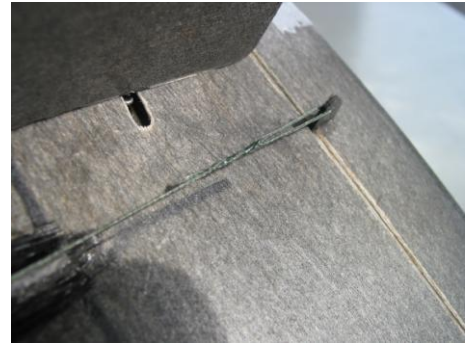

**Drill a little hole in the boom** to lead the wire inside the fuselage to the servo.



## 6. Fuselage structure

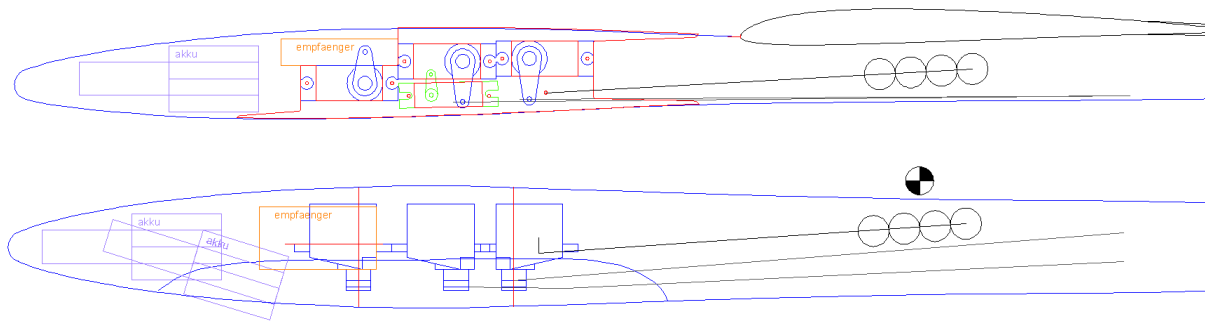

(Systemzeichnung)

### 6.1 Radio board

At the moment we recommend the servo **Graupner C261**. Therefore the radio board which is enclosed in the kit has cuttings prepared for this servo. For the **rudder** we still recommend **D47 from Dymond**. (On the model in the picture we used the X31, which is the same.)

The assembly plates of the D47 are situated a bit deeper than the ones of the Graupner servos. Therefore we supply a **U-formed part** to put below the assembly plates and lift the D47 to the same height.

These are the tried and tested **lengths for the levers of the servos**:

Lever for aileron: 13mm  
Lever for elevator: 10mm  
Lever for rudder: 9mm

The servo for the elevator is situated in the front, the servos for the ailerons behind and the servo for the rudder is placed under the servos for the ailerons.




In order to **gain full strength**, it is absolutely necessary to **fix the radio board** in the fuselage!

Before you glue the radio board, you should first **find out the optimal position**. To do so, place the radio board inside the fuselage without gluing and mount all servos. The front aileron servo should be situated 115 mm from the fuselage Tipp.

Make sure that all **levers are freely movable** (also with canopy mounted), and that the **deflections** of the levers are big enough. If necessary, you can grind the edges of the servo levers a little bit.

Note that the pushrods for the **ailerons must be lead beside the ballast**. (see drawing at the top).

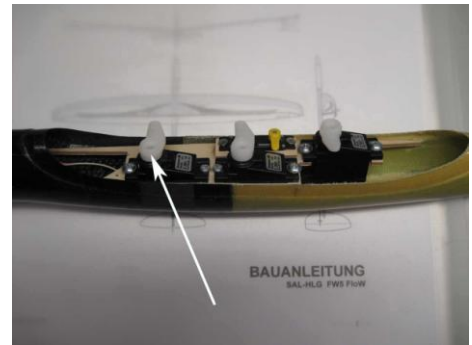

Before you fix the radio board in the fuselage, **grind all gluing spots** thoroughly.

You can fix the radio board with a **drop of super glue** to make the position check easier.



Glue the board carefully **with epoxy-glue** (for example UHU 300 endfest or Stablit, no fast hardening epoxy resin). You can fill the glue into a small plastic bag and cut a whole on one corner. By this, it will be easier to apply the glue exactly.

You can add **carbon rovings** left and right of the gluing spots for additional strength.

If you have a **hard landing**, always **check** if the radio board is still fully glued before you make the next start!



## 6.2 Ballast:

As ballast we use lead **balls** from the **fishing shop**. One ball weighs about 10g. You can easily assemble and vary this kind of ballast.


The balls are strung on a **steel wire**. With a small **hook** at the end of the steel wire the ballast can be **locked** on the radio board.

To locate the exact position of the ballast inside the fuselage, lay the model on a **device for measuring the centre of gravity** (see picture). Move the ballast until you get the desired centre of gravity







When bending the wire you should make sure that you **don't create 180 ° curves**, as the wire may break then.

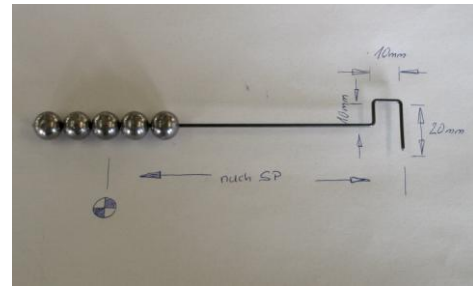

The **long screw**, which fixes the wing in the front, serves as **separation** between ballast and push rods. When you mount the ballast, thread the wire with the balls into the fuselage left of the front screw.

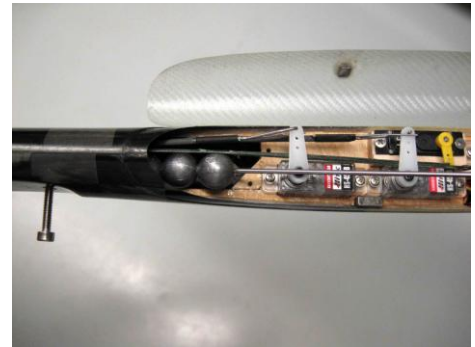

The **hook** of the ballast package is **locked in the servo board**.

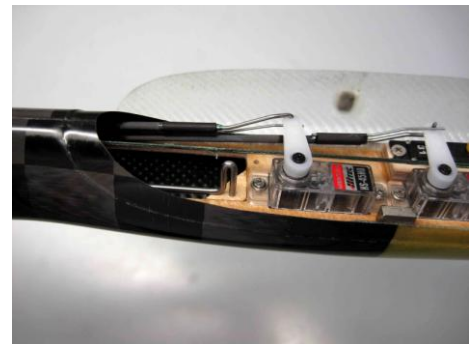

### 6.3 Accumulator and receiver

Depending on the size of battery and receiver different ways of shapes for the accumulator package are possible.

In any case, we recommend to **assemble the battery cells** with **adhesive tape** first. **Check**, if it fits inside the fuselage together with the receiver, before you solder the cells.



At the side you see two possible shapes for the battery package.

If you want to use a big **8 channel 2,4 GHz receiver**, you can remove the plugs and **solder the servos directly onto the board**. With our indoor colleagues this is already quite normal.





#### 6.4 Canopy lock:

The canopy is fixed with **adhesive tape** on the bottom and can be closed with **two magnets** on the upper side.

Glue the **first magnet** on the **radio board** on the upper side of the fuselage with super glue.




Then put the **second magnet onto the first one**. The magnet should be **sanded** as well as the inside of the canopy. Now put a **drop of super glue** on the second magnet and spray **activator into the canopy**. Then you lift the hood carefully over the magnet in the desired position. You should **check the good fit** of the canopy before, as this process defines the position of the canopy.

Wait a few seconds, then you can strip off the canopy and close it again. **Check the fit** of the canopy. If you are still not satisfied with the fit, you can easily break the magnet out of the canopy again.

When you are satisfied with the position of the magnet, you can **put more glue** around the magnet to improve the join.

#### 6.5 Installing 2.4 GHz

The installation of the **2.4 GHz receiver** should be in the **front of the fuselage**, where the fuselage is made of kevlar. Make sure that the antennas are not covered by the receiver battery. That means the antennas should be placed directly **on the side of the fuselage**.

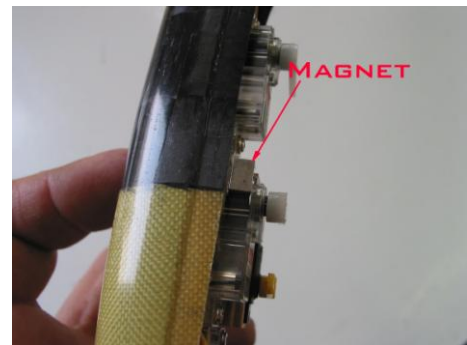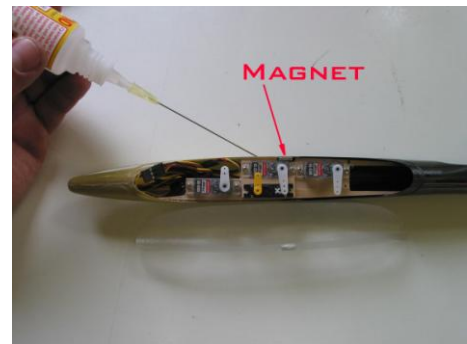
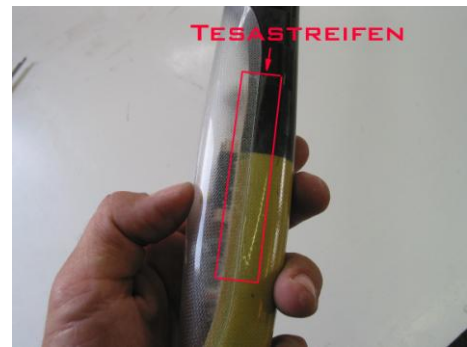


## 7. Controlling the ailerons

### 7.1 Connection of levers



**Bend, press and grind the brass pipes** according to the picture.

Drill holes with a diameter of **1mm** for hooking in the push rods.

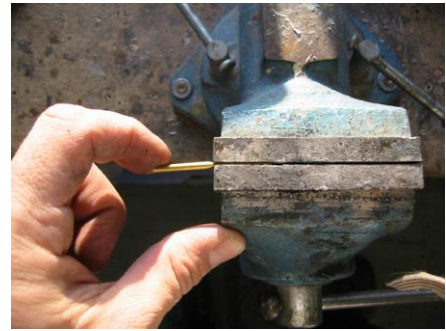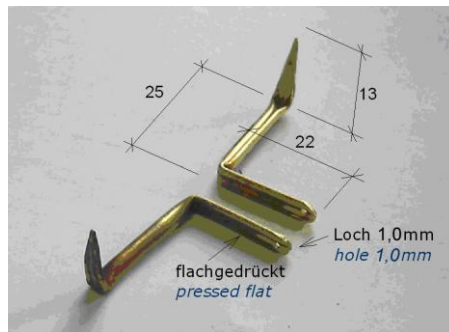


Glue the brass levers **with thickened epoxy glue or epoxy resin** to the ailerons.

The levers should be situated as **near** as possible **to the turning axis** of the aileron.

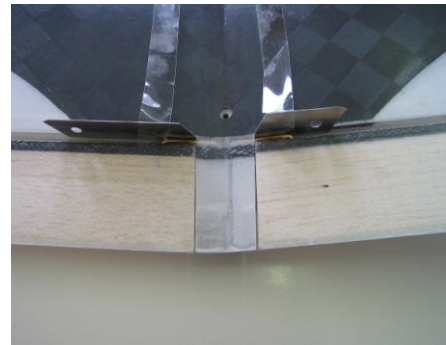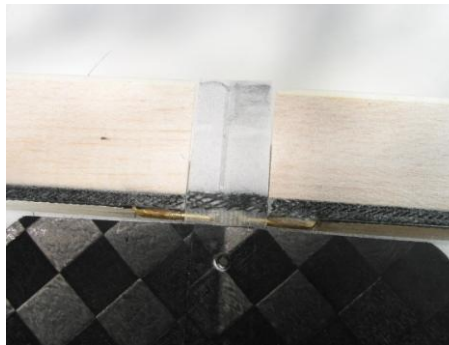



View from below:  
You see the brass levers standing out.

The 2<sup>nd</sup> picture shows the fuselage with its whole for mounting the wing. Use a **pair of tweezers** to mount the levers through this whole.

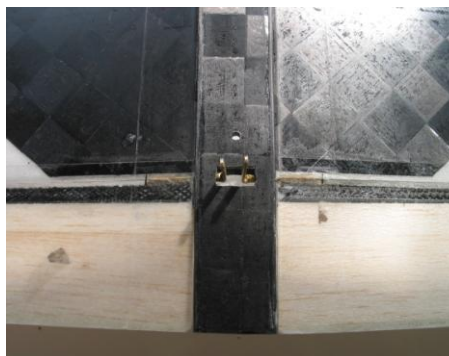


## 7.2 Push rods

The push rods are made of 2mm **CFR-pipes**, into which you glue a **bent 1mm steel wire**.

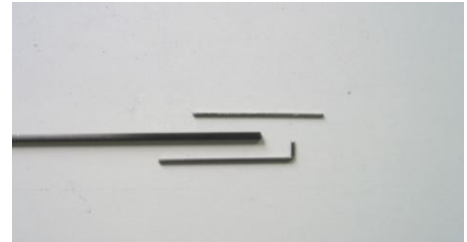
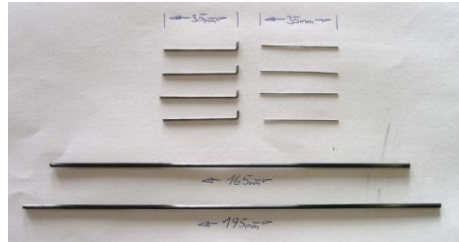


A **0.5-0.8mm steel wire** will serve as **protection** against dismantling. The parts are held together with a shrinking tube.

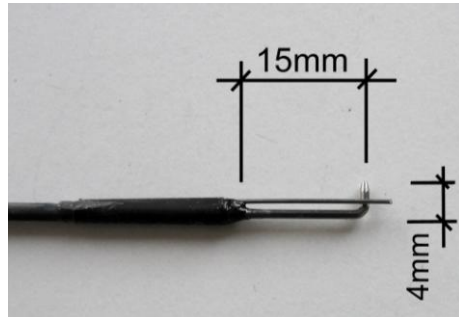

First you must **sand** the hook **thoroughly**.

Then you drop **thin super glue** on the prepared spots and push the hook into the pipe.

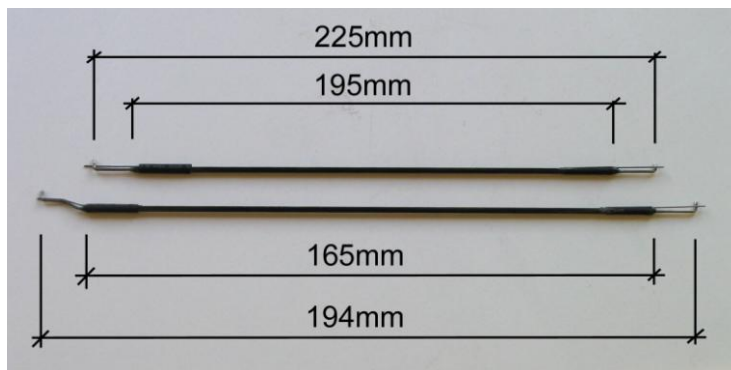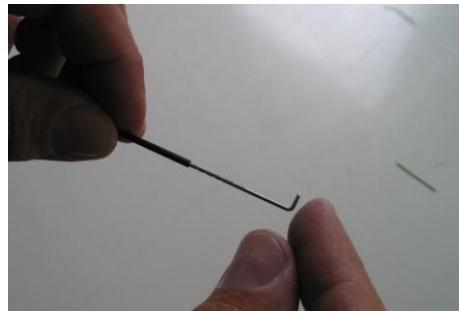

Before you glue the hook on the other end of the carbon pipe, mount the push rod in the fuselage and switch on the radio control. Fix the hook after trimming **in the right position** with **super glue**.



Note that you must **pull out the hook** to **apply super glue** and then push it back again.

It is **not enough** to let the super glue run into the pipe when the hook is already inside.

For the right aileron a **cranked hook** is required, so the pushrods don't interfere with each other. (See also lower large photo on the next page.)





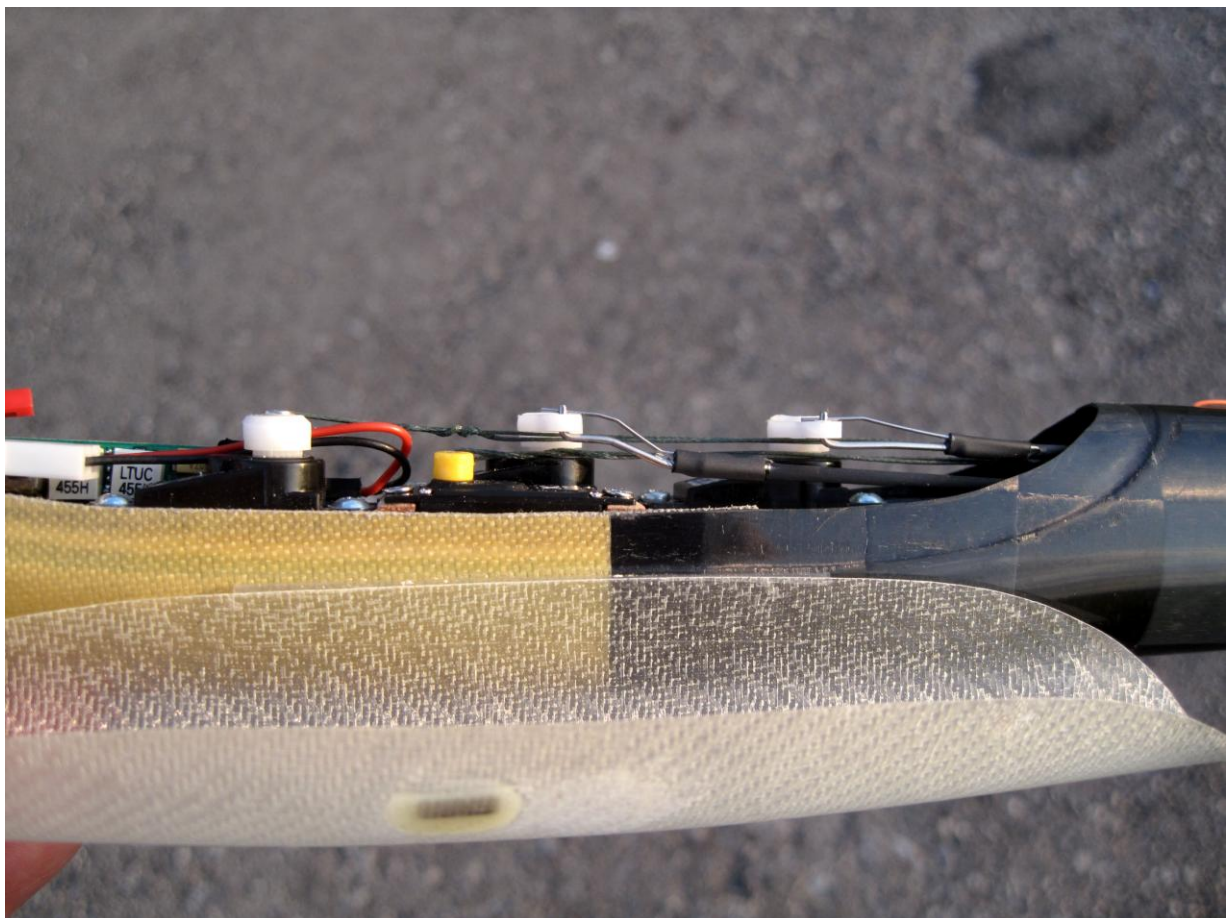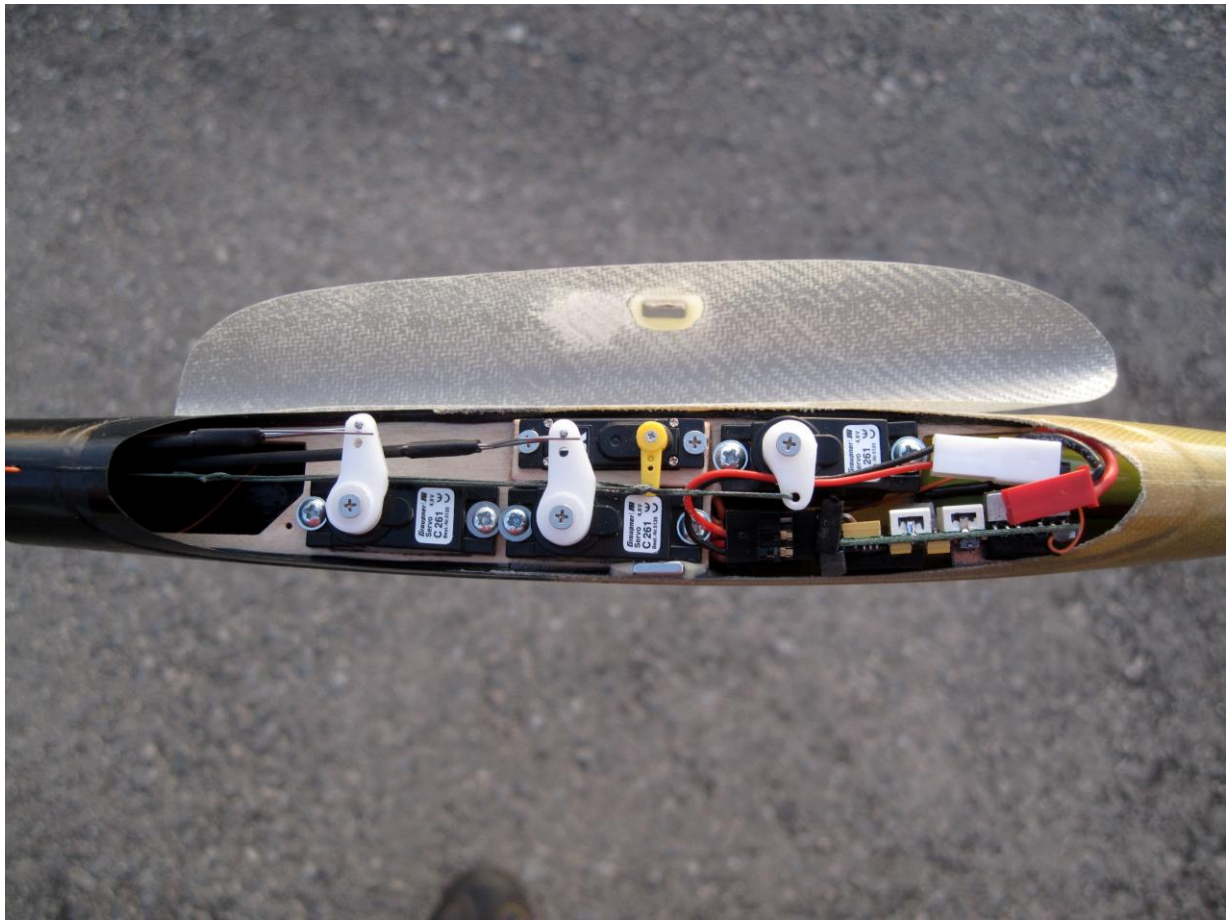

View from below

## 8. Installation of the throwing blade

### Alignment

#### Side view:




**Tilt** the blade **on the upper side** of the wing a little bit in the **direction of flight**.

#### Front view:

Mount the blade **right-angled to the wing**.

#### View from above:

**Turn the axis** of the blade a little bit **to the fuselage** (looking in direction of flight).

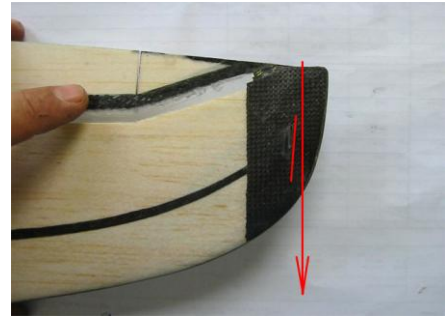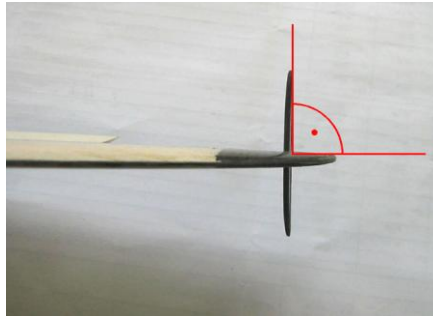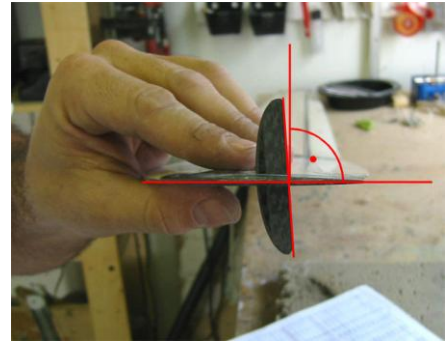

Grind the blade, so that it gets an **aerodynamical cross-section** and it **feels handy** when you hold it in your fingers. Don't make the trailing edge too sharp. You might injure yourself when throwing your DLG.




Lay the **paper template** on the wingtip and **thrill a hole** at the **marked spot**.

(Both wingtips - left and right - are prepared for the installation of a throwing pin or blade.)



**Mark the length** of the blade.

Remember, that the axis of the blade should be turned a little bit to the fuselage (looking in direction of flight).

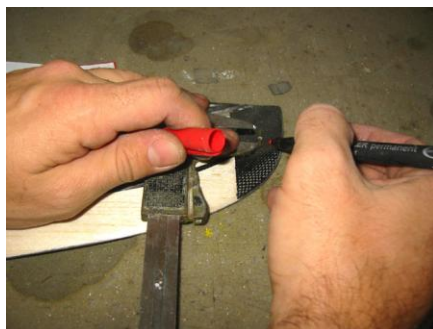



Now **cut an opening** into the wing with a small driller or a milling cutter.



If the cut is big enough, **put the blade through** and **align** it in all directions (see above).

When the position is correct, **fix the blade with super glue**.



Ready mounted  
throwing blade



You should additionally strengthen the joint by **forming a rim of glue**. Use f.e. UHU 300 endfest oder Pattex Stabilit.



## 9. Optimizing

### 9.1 Centring the masses

During our extensive tests we have found out, that **centring the masses in the middle of the glider** is even before the take-off weight the most important fact to **optimize the throwing height**. That means it is better start with ballast in the middle of the glider than to start very light. Every pilot should optimize his model, so that he can easily handle the weight of his glider when launching it, but carry as much ballast as possible. In addition, the amount of ballast of course also depends on the wind and thermal power. As you see, there are still many ways to optimize.

**Mark Drela** has developed a method to **measure the yaw of gyration**. This defines how good or bad a glider has centred its masses:

Hang your model upside down on two 1,5m long threads, which you fix 30mm from the centre of gravity. Now move the glider for 45° and let it swing. Take the time of 5 swings. Repeat this process several times to get an average value. The faster the model swings, the faster it will stabilize after the launch and the higher it will start.




#### 9.1.1 Flightpath during start

You could reach more starting height when you adjust the flightpath to the wind strength. When the wind is weak you should start very steep into the sky. And when the wind is strong the flightpath should be much more flat.

### 9.2 Ends of the ailerons

In order to move the triangular ends of the ailerons, stick a **0.5mm steel wire** with adhesive tape on the trailing edges of both control surfaces.

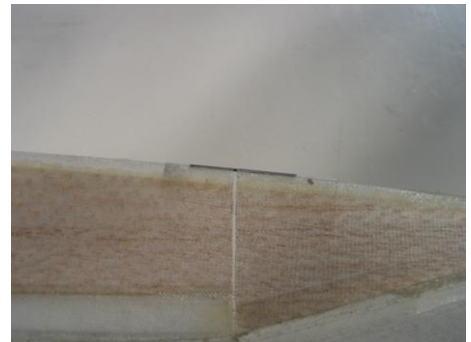

### 9.3 Leading edge of the wing

As you nearly don't recognize a damage of the leading edge of the wing (f.e. after hard landing), we advise to put a **strip of adhesive tape over the leading edge**.

The film is thin enough not to disturb the aerodynamic, but it surely will extend the lifetime of your glider.

### 9.4 Voltage control


We recommend **DLG-saver from Simprop** against power failure of your glider.




## 10. Installation of antenna 35Mhz

In order to have an undisturbed reception a **part of the antenna** must be situated **outside the model**.

An easy solution is to **fix the antenna to the end of the elevator**. Lead the antenna inside the fuse behind the wing and then leave the fuselage.

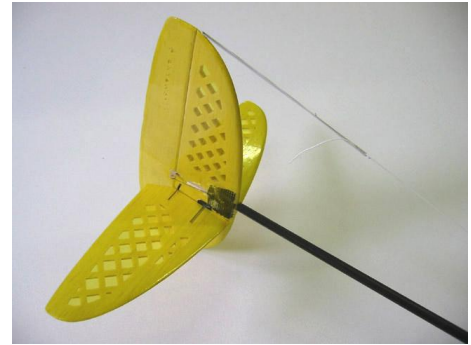

Another possibility is to lay the antenna **inside the gap of the aileron**. For improving reception on **carbon wings** you can solder the antenna to a steel wire,  $d=0.3\text{mm}$ , which you fix at the end of the wing and let stand out to the back about 10-15cm.

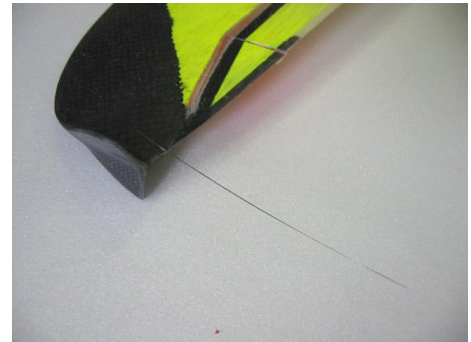

Always **TEST THE RECEPTION** on ground before you fly!

**For installing 2,4 GHz:** look at chapter "fuselage structure"



## OTHER

### 11. Check list before starting:

1. Check **centre of gravity**
2. Check **control surfaces**:  
Do control surfaces move in the correct direction?  
Check the greatest swings
3. Check **reception**:  
Leave the antenna inside the radio control and go away from the glider up to a distance of about 60m.  
The control surfaces should not tremble.
4. Check **control surfaces before each flight**.  
Do all control surfaces still move correctly?  
Is there enough power in the accumulator?  
Are the brakes retracted?  
You can save the retraction of the brakes in your start setting. By this, you can never start with extended brakes.
5. **Gentle launch** from the fuselage. No DLG-launch at your first flight. If there are some wrong settings, everything will go too fast at the disc-launch to correct these failures by steering.
6. **Fix the 2-part-elevator** with an adhesive tape to avoid unintended demounting.
7. Install a **voltage control**. Digital servos and the 2,4Ghz system need more power, especially when it is very cold

### 12. Notes for the use

To avoid heating of the carbon surface, models with carbon wings should **not lie in the sun**.


**During flight** heating by the sun is no problem, as the model is **cooled by the wind**. **On ground** the glider should be kept **inside protective bags** or **in the shade**.

After every **ungentle landing**, you must **check your model for possible damage**, such as:

- Is the radio board still glued thoroughly?
- Did the leading edge of the wing burst open?
- Did rudder or elevator get damaged?

**Even a small damage could lead to write-off at your next launch!**



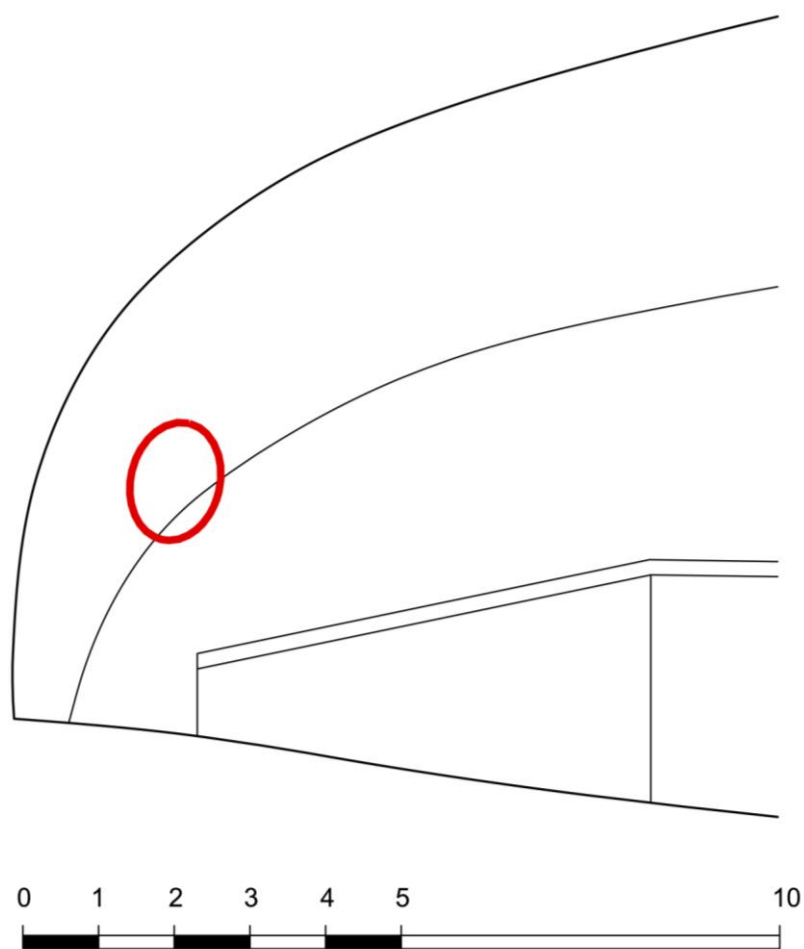

Template for the blade